


Specifications

Model No.	Item No.	Discharge	Listing	H.P.	Volts	Hz	Running Amps/Watts	Performance GPM @ head				Weight	Dimensions (W x H.)
								5'	10'	15'	Shutoff		
WRSC-6	506065	1-1/2"	UL/CSA/IAPMO	3/10	115	60	9/7/20	45	29	12	18'	25	14.50 x 9.91
WRSC-6	506066	1-1/2"	UL/CSA/IAPMO	3/10	230	50/60	5/7/20	45	29	12	18'	25	14.50 x 9.91

UL/CSA Listing for Pump only

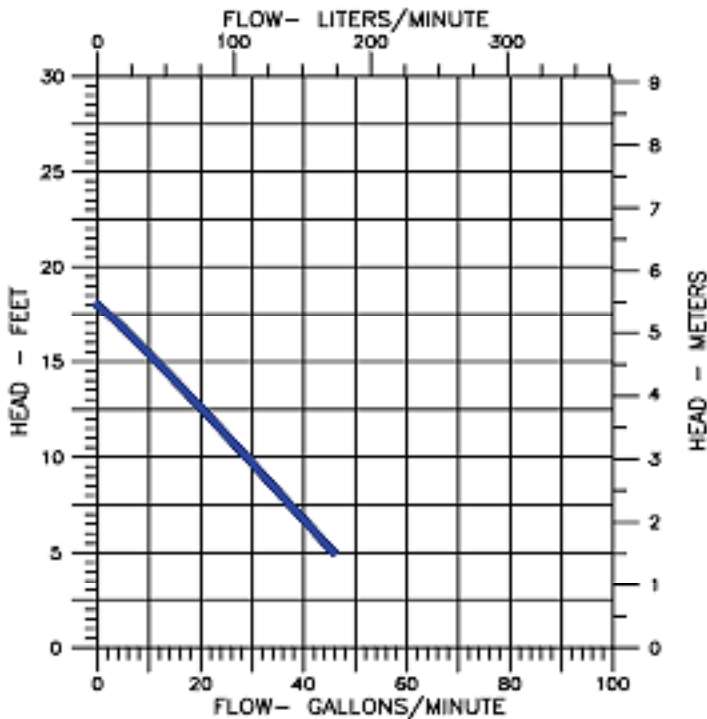

Pump Construction

Motor Housing	Epoxy-coated cast iron
Impeller Material	Nylon
Impeller Type	Non-Clog
Volute	Epoxy-coated cast iron
Power Cord	SJTW
Mechanical Shaft Seal	Carbon and ceramic faces with nitrile bellows
Fasteners	Stainless steel
Shaft	CRS
Bearings	Upper and lower sintered sleeve bearings

Basin Construction

Basin/Cover	Polypropylene
Basin Fluid Capacity (Approx.)	3.5 gallons
Discharge Size	1-1/2" FNPT
Intake Size	1-1/2" FNPT
Vent Size	2" FNPT