




SkimOIL, Inc  
103 W. Weaver Street  
Carrboro, NC 27510  
(314) 579-9755  
Fax: (314) 558-9253  
www.skimoil.com

Marine and Industrial Solutions Since 1995

EMAIL: [contact@skimoil.com](mailto:contact@skimoil.com)

## Orange Oil-Resisting PVC (Smooth Covered) Suction/Discharge Hose

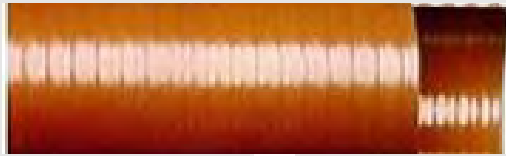

Nominal I.D.	Nominal O.D.	Working Pressure (at 68 Degrees F)	Weight LB/FT
1"	1.29"	120 PSI	.31
1-1/4"	1.57"	90 PSI	.43
1-1/2"	1.87"	80 PSI	.57
2"	2.44"	85 PSI	.87
2-1/2"	2.78"	40 PSI	1.19
3"	3.54"	75 PSI	1.62
4"	4.65"	75 PSI	2.56
5"	5.65"	55 PSI	3.15
6"	6.80"	50 PSI	4.64

**Description:** Oil-Resistant PVC Smooth Suction/Discharge House. General Suction for Light Oils and Animal Fats.

**Tube:** Orange PVC

**Reinforcement:** PVC Helic

**Cover:** Smooth Orange PVC

**Temperature Rating:** -10 degrees F to +130 degrees F.

**Maximum Length:** 100 Feet.