



Model  
R/OSe

**R/OSe**  
Stainless Steel Oil Water Separators

**The R/OSe Series oil water separators are designed for applications that require compact highly customizable corrosion resistant designs.**

Skimoil R/OSe Series, steel oil/water separators are a high performance, coalescing design for removal of free and finely dispersed oil droplets from oily wastestreams. The design follows elements of the American Petroleum Institute's (API) #421 Design & Operation of Oil/Water Separators Manual, February 1990 and modern coalescing theories.

R/OSe performance: <10mg/L, 30-micron free, dispersed and non-emulsified oil droplets.

The R/OSe steel design is one of 8 different oil/water separator designs from SkimOIL that can be used singularly or in combination with other treatment processes such as emulsion cracking, DAF & clarifier pretreatment.

The R/OSe separators have the benefit of being compact with a small footprint and being of stainless steel construction.

The separators are available in capacities from 5 to over 100 GPM for installation above, flush with grade or below grade and can operate via gravity or pumped flow.

Our designs can be used to separate oils, fuels, fuel oils, bunker, refined petroleum derivatives, LNAL, DNAPL, vegetable oils, mineral oils and FOG and more.

### **Standard Features:**

- ◆ 304 or 316 SS construction
- ◆ Fixed water weir
- ◆ Adjustable rotary oil skimmer
- ◆ Influent diffuser
- ◆ Effluent chamber
- ◆ Gasketed vapor cover
- ◆ NPT fittings
- ◆ Vent fitting
- ◆ Flat or V-hopper Bottom
- ◆ Flow-Thru coalescing media

### **Typical applications:**

- ◆ Groundwater remediation
- ◆ Mobile separation system
- ◆ DAF/Clarifier pretreatment
- ◆ Power plant water treatment
- ◆ Refinery process water
- ◆ Aircraft wash racks
- ◆ Machining coolant oil removal
- ◆ Tank farm tank bottoms
- ◆ Vehicle washwater treatment
- ◆ R.O. Filter pre-treatment
- ◆ Oil spill recovery
- ◆ Trench water treatment
- ◆ Bilge water treatment
- ◆ Hydraulic fluid tank de-watering



Model  
R/OSe

# R/OSe

Steel Oil Water Separators

The R/OSe separators can be provided with many options to create a complete, custom system design to fit your application and particular needs.

Customization of the separator tank is offered to further tailor the design to your needs.

### Options:

- Influent feed system
- Effluent pump out
- Oil pump out
- Sludge pumpout
- Sheen Coalescing Media secondary coalescer
- Elevating legs
- Drum oil skimmer
- Pipe oil skimmer
- Belt oil skimmer
- Expanded effluent chamber
- Expanded oil reservoir
- Inlet pre-separation/settling chamber
- Alternate media construction
- Effluent solids filter
- Effluent carbon (GAC) filter
- Effluent AQAM (organoclay) filter
- High level alarms
- Freeze protection
- Vent scrubber
- Oil monitor/readout system
- High temperature design
- 304 or 316SS tank construction
- Sheen Coalescing Media secondary coalescing media
- Elevated design
- Walkways/platforms
- Trailer mounted systems
- Containerized systems
- External storage/pre-separation tanks
- pH neutralization system

### The R/OSe flat bottom design:

Apply in low/no solids applications or where budget constraints require a Simple design.

- Elevation legs can be provided to meet site elevation requirements.

### The R/OSe flat bottom design with expanded effluent:

Apply in low/no solids applications where integrated effluent pumpout is Desired or required.

- Elevation legs can be provided to meet site elevation requirements.

### The R/OSe with sludge V- hopper:

Apply to applications where solids will be present and the need for sludge collection and removal is required.

- Elevation legs can be provided to meet site elevation requirements.

### The R/OSe with hopper bottom and expanded effluent:

Apply to applications where solids will be present and the need for sludge collection and removal is required.

- Expanded effluent allows clean water pumpout directly from tank.
- Elevation legs can be provided to meet site elevation requirements.

**SKIMOIL**<sup>®</sup>  
INC.

# R/OSe

## Steel Oil Water Separators

### Coalescing Separation Process

When a coalescing media is placed in the wasteflow oils impinge (attach to) the media surface as the oil droplets pass by or run into the media surface. Plastic media typically works best as the petroleum and media materials are attracted to each other.

As the oil droplets adhere to the media they combine (coalesce) into larger droplets and eventually pull away from the media to float to the water surface. Once at the water surface the accumulating oils are skimmed by the oil skimmer and drop into the oil reservoir.


The coalescing process allows the removal of smaller droplets than gravity separation can attain.

Our Flow-Thru coalescing media is designed to provide many changes of flow direction, numerous impact sites and a large surface area. Inclined corrugations in the plate design provide channels for solids settling as well as oil separation.

### Construction

Standard material of construction is 304 stainless steel. We also offer 316 & 2205 super duplex SS for all OSe models and fiberglass construction of models OS2 through OS16.

Our Flow-Thru coalescing media are offered in PVC, HPVC, polypropylene, glass-coupled polypropylene, 304 & 316 stainless steel. The media plate spacing offered are 1/2", 3/4", 1" and 1.2".

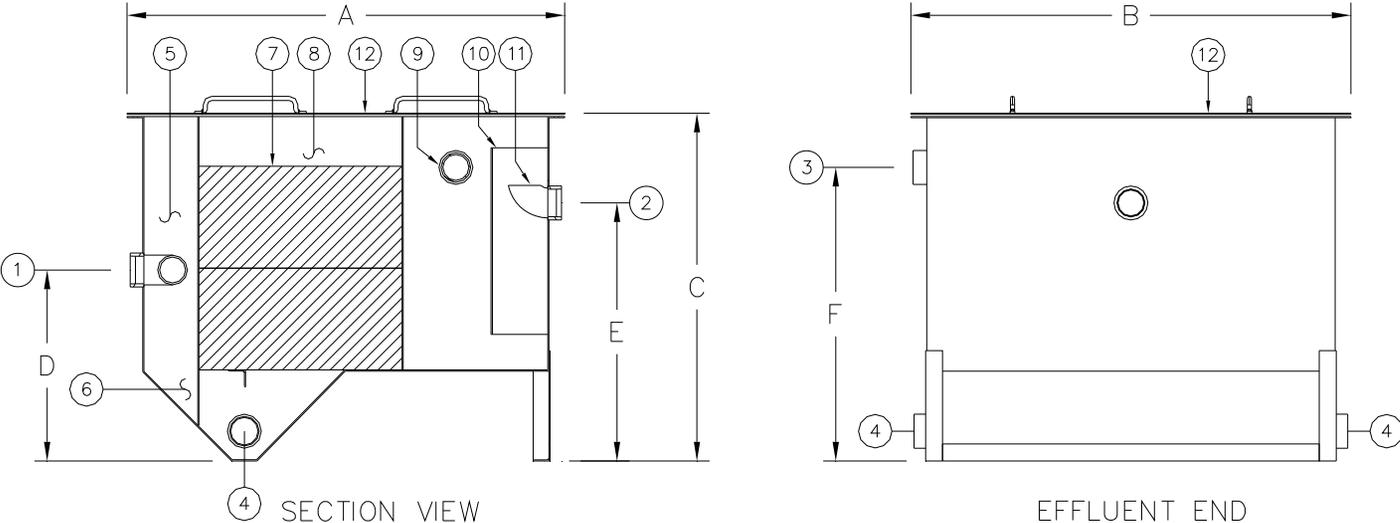

Model	Length	Width	Height	Inlet	Outlet	Oil Outlet	Inlet Size	Outlet Size	Sludge Outlet Size	Oil Outlet Size	Empty Weight	Operat. Weight Lbs.	Flow Rate GPM (Max.)
	A	B	C	D	E	F							
R/OSe-2	51"	16"	31"	16.5"	20"	22.5"	2"	2"	2"	2"	170	380	5
R/OSe-4	51"	28"	31"	16.5"	20"	22.5"	2"	2"	2"	2"	251	668	10
R/OSe-8	52"	28"	43"	22"	30"	34"	2"	2"	2"	2"	349	1395	25
R/OSe-12	52"	40"	43"	22"	30"	34"	3"	3"	3"	3"	585	2100	36
R/OSe-16	52"	52"	43"	22"	30"	34"	3"	3"	3"	3"	980	3065	50
R/OSe-24	82"	40"	53"	41"	37"	37"	4"	4"	3"	3"	1150	4100	72
R/OSe-36	82"	40"	65"	53"	43"	49"	4"	4"	3"	3"	1320	5200	100
R/OSe-48	82"	52"	65"	53"	43"	49"	6"	6"	3"	3"	1660	6500	133

Item	Qty	Description	Item	Qty	Description	Item	Qty	Description	Item	Qty	Description	Item	Qty	Description
1	1	Inlet	4	2	Sludge outlet	7	1	Flow-Thru media	10	1	Oil baffle	13		
2	1	Outlet	5	1	Inlet	8	1	Media chamber	11	1	Outlet weir	14		
3	1	Oil Outlet	6	1	Sludge hop	9	1	Oil skimmer	12	1	Cover	15		
												16		

Dimensions, design and capacities are not for construction and are subject to change without notice. Maximum flow rate is based on gasoline range specific gravity.



# R/OSe Steel Oil Water Separators Engineering Specification

## Model R/OSe-2 thru R/OSe-48

### Performance

Skimoil R/OSe Series Oil/Water Separators are designed to produce an effluent concentration of 10 mg/l or less of oil droplets 30 micron and larger of non-emulsified, free and dispersed oils. By virtue of our Flow-Thru coalescing media and tank design, readily settleable solids are also removed.

## Section 1.0 Separator Design

### 1.01 Design

The oil/water separator will be designed and fabricated per the following specifications. Rectangular tankage with features as described designed using elements of API #421 Design & Operation of Oil/Water Separators Manual, Stokes law and modern coalescing theories. The design will incorporate flexible flow rating capability based on application parameters.

### 1.02 Influent Chamber

Influent flow enters the clog proof influent diffuser and is immediately spread out across the depth and width of the chamber. Any readily settleable solids drop to the bottom of the tank or into the V-shaped solids accumulation chamber (when provided) located directly under the Flow-Thru coalescing media pack.

### 1.03 Oil/Water Separation Chamber

The separation chamber is to be packed with Flow-Thru cross-fluted coalescing media. The media pack will be designed to create a quiescent zone, a laminar flow pattern to facilitate the impingement of oil on the media, and will provide numerous impact sites and changes of flow direction. The media shall have a 60-degree cross-flute angle.

### 1.04 Solids Accumulation Chamber (Model OSe-V)

The separator shall have a V-shaped solids accumulation chamber located under the coalescing media. This chamber will provide temporary solids storage. The chamber walls are to be pitched at 45 degrees to assure simple and thorough solids removal. Dual outlet ports will be provided for sludge removal.

### 1.05 Clean Water Effluent Chamber

The cleansed water will flow under the oil retention baffle, over the water weir and into the effluent chamber. This chamber is to have the capability to be expanded at the factory by modifying the standard integral chamber so a greater volume of water is available for pump suction directly from the R/OSe tank.

### 1.06 Oil Skimmer

The separator shall be provided with an adjustable cylindrical oil skimmer that allows the skim head to be readily removed or adjusted via rotation. The skim head rotation collar assembly will be provided with a Buna-N seal. The oil skimmer is to be located at the effluent end of the separation chamber. The skimmer shall not require lubrication for operation.

### 1.07 Separator Cover

The separator is to have a single or multi-section cover that provides complete closure of the tank. The separator cover will be mounted to the tank via zinc plate hardware and vapor sealed with an industrial grade closed cell, compressible polyethylene gasket.

### 1.08 Fittings

All fittings are to be FNPT coupling up to 3". Fittings larger to be 150# FF ANSI B16.5 flange.

## Section 2.0 Materials of Construction

### 2.01 Steel Construction

Tank shell, baffles, cover and external structural members shall be constructed of ASTM 304 stainless steel. Welded joints are continuous welded and dye penetrant tested.

### 2.02 Surface Preparation

None

### 2.03 Coatings

None

### 2.04 Piping

Internal piping shall be ASTM, 304 stainless steel.

### 2.05 Coalescing Media

Flow-Thru, cross-fluted, oleophilic, PVC coalescing media shall be provided as manufactured by SkimOIL. The media shall be packed in 304 stainless steel frame(s) with lifting lugs and removable cover (media frame provided with OSe-24 & larger).

### 2.06 Cover Gasketing

Closed cell, industrial grade polyethylene constructed vapor sealed cover gasketing shall be provided. No neoprene shall be permitted.



## Oil Water Separator Options Descriptions

**Influent Feed System** Air operated, diaphragm pump with air controls or progressive cavity pump, sump level switches & Nema 4 control panel, base mounted, 115/230/460V power offered. Electric diaphragm pumps available.

**Effluent Pumpout** Centrifugal pump with level switches & Nema 4 control panel, base mounted, 115/230/460V power offered. OS Effluent chamber must be expanded to accommodate pumpout or provision of an external pumpout tank.

**Sludge Pumpout System** Air operated, diaphragm pump with air controls & Nema 4 control panel, auto on/off timer, base mounted, 115V/1ph/60Hz power req'd. Progressive cavity pump system also available. 1 - 100 GPM.

**Oil Pumpout System** Air operated, diaphragm pump with air controls, level switches & Nema 4 control panel, base mounted, 115V/1ph/60Hz power req'd. Electric gear or progressive pump systems available. 1 - 100 GPM (larger if required)

**Freeze Protection** Immersion heaters mounted through tank wall. Each heater has an independent thermocouple well, 0-100 deg. F thermostat and Nema 1 (or optional Nema 4) housing. 230/460V/3ph/60Hz power req'd.

**Sheen Coalescing Media Secondary Coalescer** High surface area, reticulated, secondary coalescing media for polishing flow after standard Flow-Thru media.

**Oil Sight Glass** Two automatic, brass valves with tempered sight glass and protection rods mounted in oil reservoir. If glass is broken check ball stops outflow from reservoir.

**External Sight / Level Glass** An externally mounted clear PVC sight tube is provided with multi-point level switch for indication or pump control of oil or water. Switch is removable for cleaning and inspection.

**Elevation Stand** Epoxy coated steel stand or legs to elevate tank to desired level. Standard deck height is 30".

Full platforms & walkways with ladders or stairways can be designed where required or desired.

**High Temperature Design** Flow-Thru coalescing media and any piping is constructed of a combination of CPVC & or polypropylene (or other materials) for temperature resistance up to 200° F.

**Alternate Media Construction** Standard Flow-Thru media is PVC. HPVC, polypropylene, glass-coupled polypropylene and 304/316 stainless media is available. Contact PAE to determine proper media type for your application. Media plate spacing is available in 1/2", 3/4" & 1.2".

**External Storage/Feed Tanks** A wide variety of tank volumes can be supplied for your water, product and sludge holding needs. Flat bottom and cone bottom designs constructed in polyethylene, fiberglass, steel & stainless steel can be provided.

**Effluent Filter Systems** Solids filter systems can be provided to remove filterable solids from the separator effluent. Contact SkimOIL to determine proper filtration needs for your application.

**AQAM Filter Systems** AQAM (Alkyl Quaternary Ammonium Montmorillonite) filter systems can be provided to remove trace hydrocarbons, sheens, DNAPLs, slightly soluble chlorinated hydrocarbons and high molecular weight organics from the separator effluent. Contact SkimOIL to determine proper filtration needs for your application. Can be used to protect and increase GAC lifespan.

**Carbon Filtration Systems (GAC)** GAC carbon filters can be provided to remove contaminants after the separator. Contact SkimOIL to determine proper system needs for your application.

**Emulsion Cracking Systems** Emulsion cracking systems can be provided to remove oil-in-water emulsions prior to the separator. Contact SkimOIL to determine proper system needs for your application.

**pH Adjustment Systems** pH adjustment systems can be provided to maintain pH levels prior to or after the separator. Contact SkimOIL to determine proper system needs for your application.

**System Containerization** OS separators with any options can be installed in a 20 or 40' shipping container(s) to simplify system provision and field implementation. System would include the complete mounting, piping and wiring of the system in one or more container as required by the project.

**Trailer Mounting** OS separators can be mounted on or in a trailer for system mobilization. Trailer design generally includes corner leveling jacks, bubble levels, electric or hydraulic brakes, piping and wiring of options.

**Field Skid Mounting** OS separator system can be mounted to a mobile skid with leveling for quick field mobilization.

**Skid Mounted System** OS separators can be combined with our other treatment equipment and options into a fully integrated, custom designed system completely mounted, plumbed and wired to a system skid. To simplify your need to do the wiring and plumbing on site, reducing your time frames and on site costs, we design around your requirements.

**Vent Scrubber** Separator vapors can be extracted and scrubbed prior to discharge to atmosphere to remove VOC content.

**Level Sensors** Level sensors can be provided to detect water and oil/fuels. One or more sensor points can be provided to perform various functions such as high level, low level, pump on/off based on liquid levels and level detection for DCS controls or other functions based on your needs.

**Class 1 Div 1 & 2** Systems can be designed for use in a class 1 div 1 or 2 environment. Controls, components and wiring are changed to meet the needs of these environments. Intrinsically safe relays are also used for level sensors.

**Oil Monitor** An oil detection system can be provided to monitor effluent oil content and provide various actions based on the oil alarm setpoint. Actions might include: audible/visual alarm, redirection of influent or effluent via actuated valve, shutdown of influent pump or your custom action.



# Oil Water Separation Theory

**Coalescing Oil Water Separators:** Coalescing Oil Water Separators are passive, physical separation systems designed for removal of oils, fuels, hydraulic fluids, LNAPL and DNAPL products from water. SkimOIL's designed performance can be described by a combination of Stoke's Law and current coalescing plate theory, wherein, the oil droplet rise rate and other parameters dictate the surface area required for gravity & coalescent separation.

**Separation Process:** The water/oil mixture enters the separator and is spread out horizontally, distributed through an energy and turbulence-diffusing device. The mixture enters the Flow-Thru media where laminar and sinusoidal flow is established and the oils impinge on the media surface. As oils accumulate they coalesce into larger droplets, rising upward through the pack corrugations until they reach the top of the pack, where they detach and rise to the water's surface. At the same time solids encounter the media and slide down the corrugations, falling into the v-hopper under the Flow-Thru media.

**Stoke's Law:** This equation relates the terminal settling or rise velocity of a smooth, rigid sphere in a viscous fluid of known density and viscosity to the diameter of the sphere when subjected to a known force field (gravity). The equation is:

$$V = (2gr^2)(d1-d2)/9\mu$$

where

V = velocity of rise (cm sec<sup>-1</sup>),  
g = acceleration of gravity (cm sec<sup>-2</sup>),  
r = "equivalent" radius of particle (cm),  
d1 = density of particle (g cm<sup>-3</sup>),  
d2 = density of medium (g cm<sup>-3</sup>), and  
 $\mu$  = viscosity of medium (dyne sec cm<sup>-2</sup>).

**Coalescence:** Gravity separation utilizes the difference in specific gravity between the oil and water. Oil separates


from a fluid at a rate explained by Stoke's Law. The formula predicts how fast an oil droplet will rise or settle through water based on the density and size of the oil droplet size and the distance the object must travel. Our separators are built to exploit both variables of Stokes Law.

With the use of our Flow-Thru media oil only need rise a short distance before encountering the oleophilic, coalescing media plates inside the separation chamber as opposed to rising a great distance in gravity separation. Upon impinging on the plates the oils coalesce (gather) into larger droplets until the droplet buoyancy is sufficient to pull away from the media and rise to the water's surface. The design will meet particular design criteria as indicated below:

- The hydraulic distribution of the influent flow must assure full usage of the cross-sectional area of the media to fully utilize the plate pack's surface area.
- Flow control and direction must be determined to prevent hydraulic short circuiting around, under or over the media pack.
- A laminar flow condition must be maintained (Reynolds "Re" number less than 500) in order to assist droplets to rise. Per the American Petroleum Institute's (API) Publication 421 of February 1990.
- Horizontal flow through velocities in the separator must not exceed 3 feet per minute or 15 times the rate of rise of the droplets which ever is smaller.
- The media containment chamber design, plate design/angle and spacing sufficient to facilitate removal of accumulating solids. Plates are to be smooth surfaced and angled at 60 deg.

## Flow-Thru Coalescing Media Design

Flow-Thru coalescing media provides a laminar flow path that creates a quiescent zone to facilitate the impact with and attachment of oils to the media surface by reducing wastestream turbulence and velocity. This control of the wastestream creates a more ideal environment for oil removal. By virtue of our Flow-Thru media design, solids will

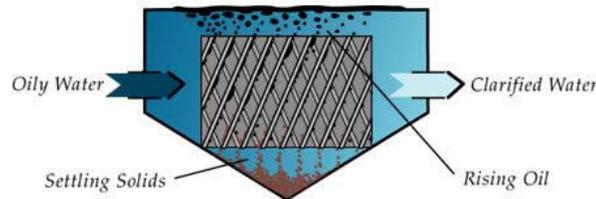

also collide with the media and settle to the separator bottom to some degree. Due to oil typically being lighter than water, they (oil) will rise up the coalescing plate. As the oil droplets rise up the plate they will coalesce or come together with other droplets, creating progressively larger droplets. Once the droplet size is sufficient or the droplet reaches the top of the media plate the droplet pulls away from the plate and rises to the water surface. To some degree, the solids replicate this process in reverse (settling).

## Gravity Separation vs Coalescing Plates

Two types of oil water separator exist today in varying types of design, but all are dependent on these two types of design.

The first and oldest type is gravity or conventional separation, simple separation via gravity (density differential between two immiscible liquids leads to one of them rising above the other). This design, when designed properly (or even improperly) provides a certain tank length, width and depth that provides a wide, quiet spot in the pipeline to give oils time to rise. This design (also known as an API separator) generally provides a discharge oil concentration of 100 ppm based on a 150 micron droplet size. The API type design relies on a large water volume. This correlates to a tank size that can be 5 times the size of an equally sized coalescing separator.

The coalescing design is known by many names i.e. parallel plate, corrugated plate, slant rib coalescer so on and so forth. However, the concept, operation and design are generally the same. The coalescing concept is based on having a large surface area in contact with the wastestream (coalescing plates). The more surface area provided, the more enhanced the separation process will typically be. By using the coalescing media, the size of the tank is reduced and a higher performance is attained than by gravity separation. Flow-Thru coalescing design provides a discharge oil concentration of 10 ppm or less with an oil droplet size of 30 or as small as a 20 micron oil droplet.

