


Drum Skimmer-Elec/Hydraulic Unit

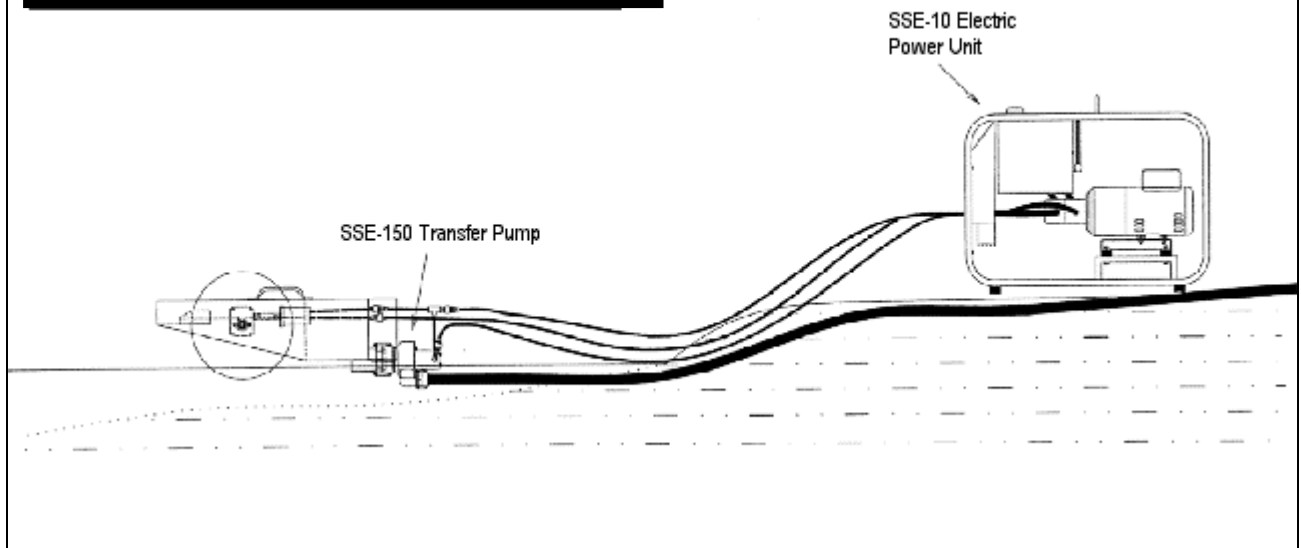

FEATURES:

- ◆ Recovery Rate: 35 GPM (8 Ton Per Hour)
- ◆ Will operate in 3" (8 cm) of water
- ◆ SSE150 pump may be used for other pumping applications
- ◆ Skimmer Weight: 80 lbs (36 kg)
- ◆ Power Unit Weight: 250 lbs (113 kg)
- ◆ Available in 220v and 440v.
- ◆ TEFC or Explosion Proof

SKIMOIL  Separator Systems

Elec/Hydraulic Skimmer System

SCALE No Scale	DRAWN BY F	DATE 8 - 12 - 94	CHECKED BY
Model #SSD811R			DRAWING# 280

Specially hardened for steel industry.

Drum Skimmer-Elec/Hydraulic Unit

Model #FDS-811

DESCRIPTION	Electrical Hydraulic Skimmer System	PUMP	SSE150
QUOTE		Type	Centrifugal
DESCRIPTION	Electrical Hydraulic Skimmer System	Size	2"
TEXT	NUMBER OF DRUMS: 2	Power	Hydraulic
	ALUMINUM: Marine Grade, Anodized	HOSE	
	POWER PACK: SSE10 Hydraulic	Kit	2" x 60' Hydrocarbon Approved 4 Pieces with Connections
	HOSE: 2" X 60' Kit PUMP: SSE150		1 - 10', 2 - 15', 1 - 20'
TECHNICAL COMMENTS	Recovery Rate: 35 GPM or 7.5 TON PER HR		
	Elec/Hydr Skimmer Pumpout System		
SYSTEM	Electric Hydraulic	ADDITIONAL TECHNICAL INFORMATION	
		Discharge Pump will pump solids to 1"	
SKIMMER		Discharge head to 130'	
Construction	Marine Grade Aluminum		
Skimmer Coating	Anodized, Corrosion Resistant		
Number of Drums	2	Skimmer	Dimensions Weight 34" X 48" X 18" 80 lbs (86 X 122 X 46 cm) 36 kg
Power	Electric Hydraulic	Power Unit	
		No Wheels	46" X 25" X 29" 250 lbs (116 X 63 X 73 cm) 113 kg
POWER PAC-SKID MOUNTED-RUBBER TIRES OPTIONAL			
Motor Type	Electric TEFC		
Motor Controller	Push Button TEFC		
Voltage	220/440 3 Phase	SHIPPING INFORMATION	
Horsepower	10		
Hydraulic Controls	Dual, variable speed	Skimmer	Dimensions Weight 52" X 42" X 25" 155# (132 X 106 X 63 cm) 70 kg
Hydraulic Pumps	Maximum Pressure 2000#	Power Pac	
Skimmer	5 GPM	Skid Mounted	49" X 32" X 38" 460# (124 X 81 X 96 cm) 209 kg
Pump	3 GPM	W/Wheels	48" X 41" X 41" 540# (121 X 104 X 104 cm) 245 kg
		Hose Kit	35" X 35" X 26" 250# (88 X 88 X 66 cm) 113 kg

Specially hardened for steel industry.