


BilgeVAP

marine waste waters on-board evaporator system #BV10285EX

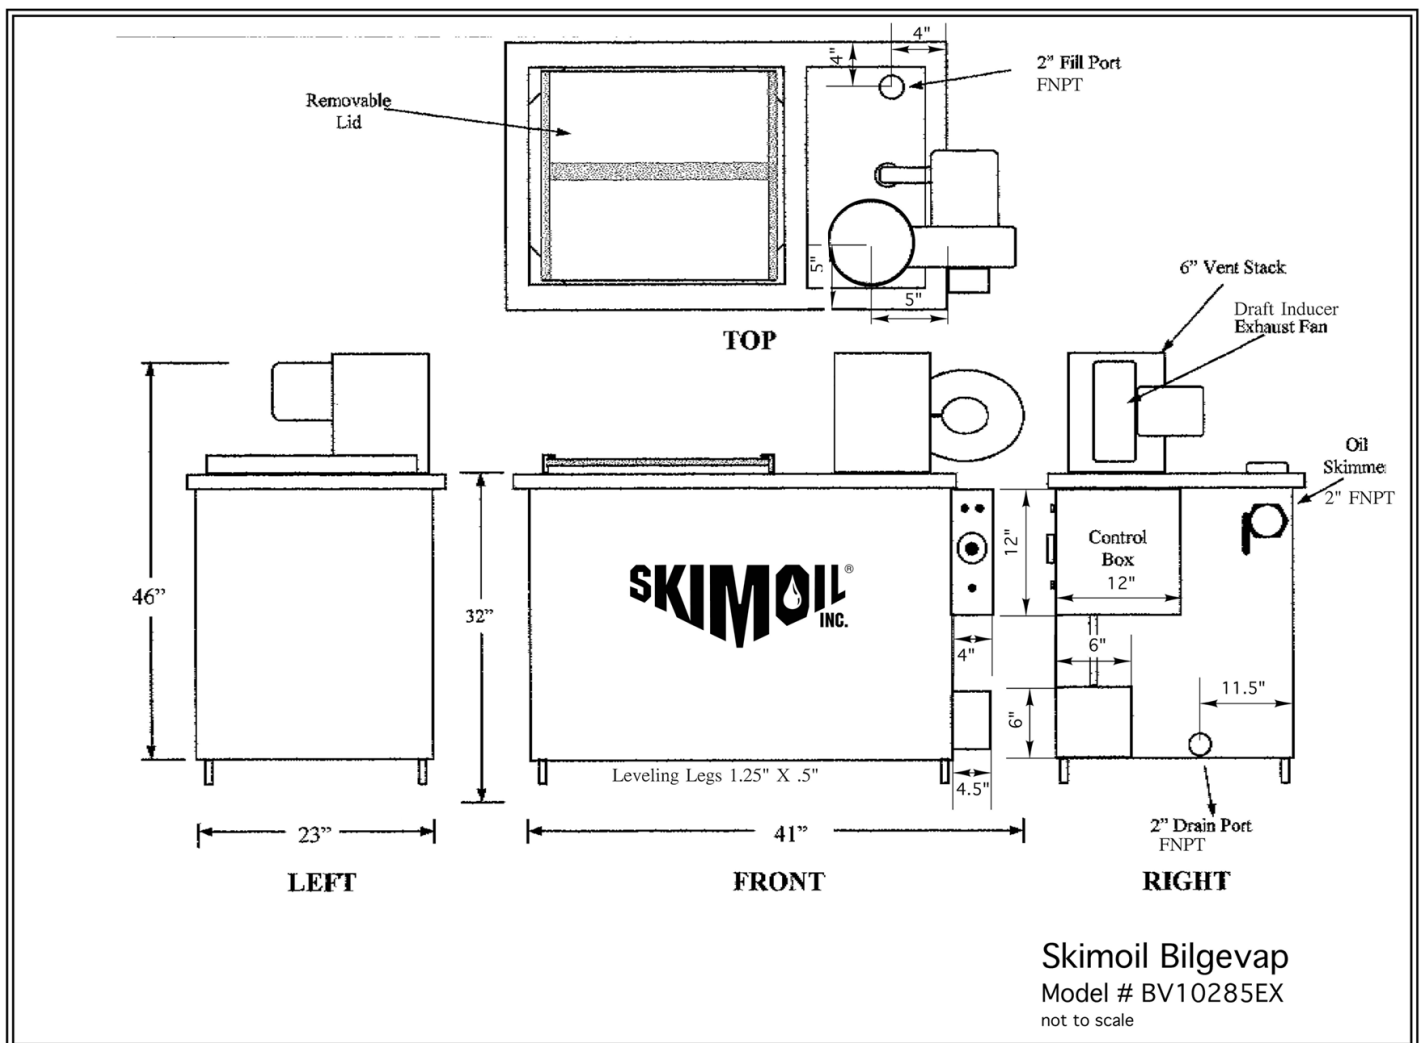

SkimOil, Inc.

103 W. Weaver St. #209 Carrboro, NC 27510 USA

Phone 314.579.9755 Fax 314.558.9253

Email info@skimoil.com Skype: Skimoil

www.skimoil.com



Oil Skimmer & Separator Systems

Maximum Evaporation Rate	Batch Fill Mode: 6 Gallons per Hour (22 Liters) Auto-Fill Mode: 4 Gallons per Hour (15 Liters)
Tank Capacity	85 Gallons (322 Liters)
Tank Construction	12 Gauge Tank w/ 1" Insulation; 16 Gauge Painted Exterior
Tank Floor	3/8" Steel Plate (Carbon or 316L SS)
Tank Height	30"
Oil Skimmer	Adjustable Weir Ball Valve
Tank Fill Port	2" NPT Coupling
Heating System	Electric, Through Floor Heat Exchanger, 11,400 Watts
Dimensions (Floor Space)	41"L x 23"W x 46" H 41"L x 33"W x 46" H (with Pump or AFS)
Utility Requirements	240 Volts/3 Phase/40 Amps (Field Convertible to 240V/1/50A); Optional 480Volts/3 Phase/ 20 Amps
Drain	Flat, Obstruction Free Floor; 2" Stepdown Drain with Plug
Vent Stack	6" Diameter
Shipping Weight	450 Lbs.
Warranty	One Year Parts & Workmanship Labor & Corrosion excluded